

# LSXST STEEL LED EXIT SIGN

LifeSafetyLighting.com™



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout chevron directional indicators.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

## LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

## DIMENSIONS

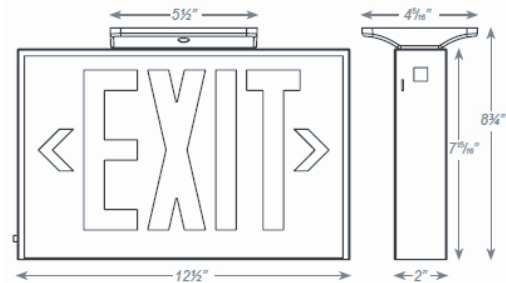

## ORDERING INFORMATION

Sample Part Number: **LSXST**

Special voltage options available. Check with your Lighting Representative.

<sup>1</sup> Available only with EM units.

**MODEL**  
LSXST

**# OF FACES**  
1 - Single Face  
2 - Universal Single/  
Double Face

**LETTER COLOR**  
R - Red  
G - Green

**HOUSING COLOR**  
W - White  
B - Black

**BATTERY**  
Blank - AC Only  
EM - Battery Backup

**OPTIONS**  
SDT - Self-Diagnostics <sup>1</sup>

NOTE: Product specifications subject to change without notice. Updated 08.2017